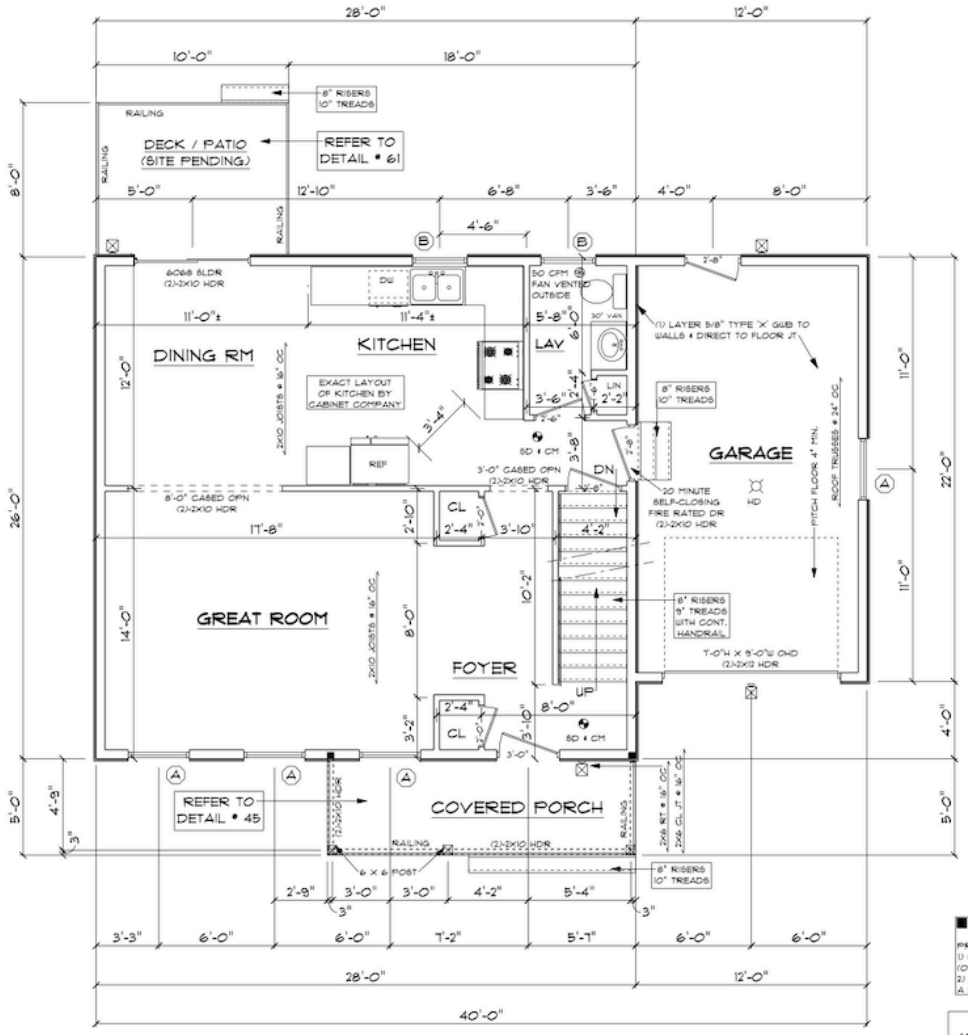

FIRST FLOOR PLAN 1/4"=1'-0"

■ = POINT LOAD FROM ABOVE

PROVIDE THE FOLLOWING:
1) SOLID BLOCKING BETWEEN BEAM (OR SILL) AND PLYWOOD SUBFLOOR
2) A MINIMUM OF THREE STUDS IN A BEARING WALL AS BEAM JACKS

2X6 STUDS @ 16" OC
AT ALL EXTERIOR WALLS
UNLESS OTHERWISE NOTED

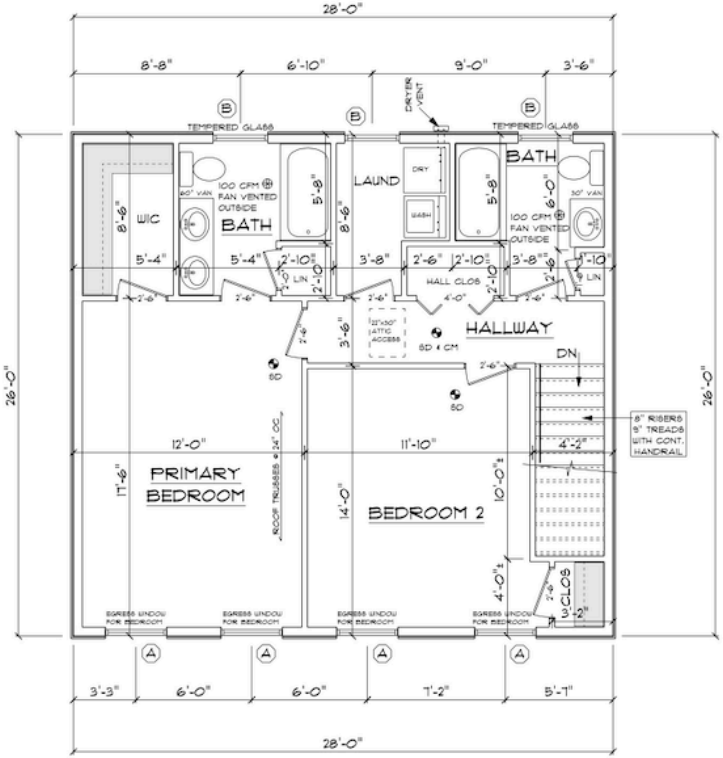

SECOND FLOOR PLAN 1/4"=1'-0"